


Pusher centrifuge P-80/2 R-R-RD NC

Year of manufacture 2022
 Delivery time 4 months

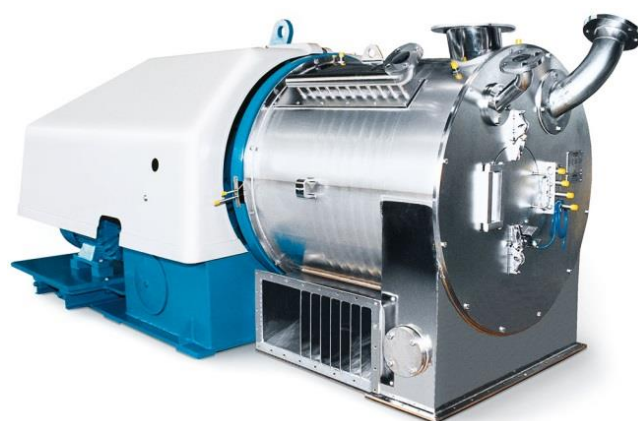

Basket	1.4462 / 1.4470 / 1.4429 (318 LN / 316 LN)				
Basket module	1.4404 / 1.4571 (316 L / 316 Ti)				
Sieves	1.4462 (318 LN)				
Housing	1.4404 / 1.4571 (316 L / 316 Ti)				
Basket diameter	800 / 722 mm				
Number of stages	2				
Max. RPM	1600 min ⁻¹				
Max. Stroke rate	84 min ⁻¹				
Max. G number	973 g				
Bearing lubrication	Oil				
Weight	8000 kg				
Design	The centrifuge is specially designed for nitrocellulose applications (NC).				
Main drive	75 kW	400 V	IP55	1475 min ⁻¹	50 Hz
Pusher drive	18.5 kW	400 V	IP55	1475 min ⁻¹	50 Hz